
MAXIMUM PRECISION CUT AFTER CUT

GET THE BEST RESULTS WITH THE HIGHEST QUALITY TOOLS



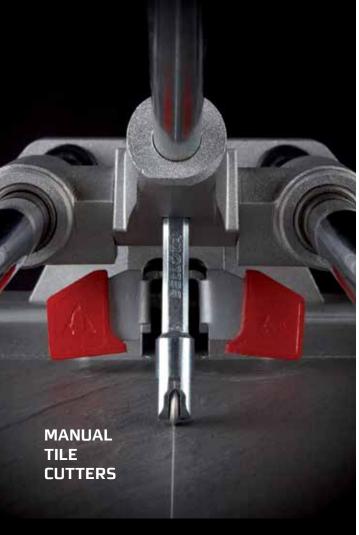

| Recommended use | Large format professional tiling jobs | Intensive tiling jobs, moderately sized tiles | Small renovation jobs, standard sized tiles, Cutting mosaic glass |
|---|---|---|---|
| Tile thickness (max.) | 0.78 inch / 20 mm | 0.59 inch / 15 mm | 0.47 inch / 12 mm |
| Cutting length capacity (max.) | <39.3 inches / 1000 mm (TECH100) <49.2 inches / 1250 mm (TECH125) | <22 inches / 580 mm (PRO55) <28 inches / 720 mm (PRO65) | <21 inches / 530 mm (POP50) <25 inches / 630 mm (POP60) |
| Diagonal cutting length capacity (max.) | <27.5 inches / 700 mm (TECH100) <33.4 inches / 880 mm (TECH125) | <16 inches / 400 mm (PRO55) <20 inches / 500 mm (PRO65) | <15 inches / 380 mm (POP50) <18 inches / 450 mm (POP60) |
| Type of material cut: Ceramic Porcelain Mosaic glass | Yes Yes Yes | Yes Yes No (fixed breaking system) | Yes Yes Yes |
| Construction | Modular assembly design with 3 aluminum beams Floating bases Full width, heavy-duty aluminum cast reinforced rail supports | Twin lateral aluminum beams with flush scoring area Heavy-duty aluminum cast rail supports | One-piece aluminum cast base with central beam Extra wide aluminum cast rail supports (Ruler with 'R' model only) |
| Scoring guide system | Solid hard chrome plated rounded bars | Solid hard chrome plated rounded bars | Solid hard chrome plated rounded bars reinforced with aluminum profiles |
| Breaking system and power | Mobile - 1000 Kg | Fixed - 500 Kg | Mobile - 200 Kg |
| Ruler/Square system included | Yes | Yes | Ruler 'R' model only |
| Scoring wheel included (with adaptor): | | | |
| Universal 15/64 inch / 6 mm | • | Yes | Yes |
| Universal 5/16 inch / 8 mm | • | • | - |
| Universal 13/32 inch / 10 mm | • | Yes | - |
| Universal 3/4 inch / 18 mm | • | • | - |
| Universal XL 5/16 inch / 8 mm | TECH75 | • | - |
| Universal XL 13/32 inch / 10 mm | TECH100/TECH125 | • | - |
| Universal XL 3/4 inch / 18 mm | • | • | - |
| Registered industrial design | Yes | Yes | Yes |
| Utility Patents | Design assembly (construction) Twin rotating protractors | Ambidextrous breaking system (left or right-handed) | |
| Packaging option | Wheelie bag | Hard case or box | Hard case or Box |
| Weight (machine only) | TECH75 - 34.0 lbs, 15.4 Kg TECH100 - 39.5 lbs, 17.9 Kg TECH125 - 46.3 lbs, 21.0 Kg | PRO55 - 24.3 lbs, 11 Kg PRO65 - 27.1 lbs, 12.3 Kg | POP50 - 9.9 lbs, 4.5 Kg POP60 - 10.8 lbs, 4.9 Kg |
| Warranty | 5 years | 5 years | 3 years |

PR055 PR065

TECH100 TECH125

POP50 POP60